

FEATURES


- UL/CUL listed Control Panel
- WASTEC Rated
- Programmable Controller
- Adjustable Hardened Shear Blade
- Automatic Bale Sizing System
- Full-Bale and Advanced Warning Indicators
- Automatic Bale Ejection System
- Auto-Cycle with Photocell
- Start-up Alarm & Light
- Name Brand Electrical & Hydraulic Components
- Custom Hoppers Available

DESIGN FEATURES

- Heavy Duty Construction provides long service life
- Automatic Cycle feature controlled by Photocell
- Power Source IHM (Integrated Hydraulic Manifold) system reduces the number of hydraulic hoses & fittings, providing a cleaner, more reliable and more durable hydraulic system
- Hydraulic Door Latch
- Conveyor Feed Controls with Photocell
- Conforms to all current ANSI Z 245.5 safety standards
- WASTEC Rated

OPTIONAL FEATURES

- Remote Power Unit
- Oil Cooler
- Oil Heater
- Biodegradable Oil
- Custom Hopper Solutions
- Standard or Pit Conveyor Systems

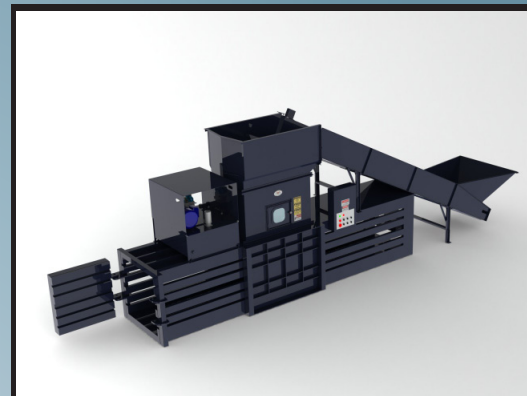


The GTS HH-60 Closed End Horizontal Baler is ideal for warehouses and designed for ease of installation, operation and maintenance.

The GTS Closed End Horizontal Baler is built with extra heavy duty construction and is ideal for warehouses and recyclers who deal with large quantities of corrugated and paper products. This machine is designed for long hours of operation and can operate either manually or automatically with photocell control. Optional custom engineered feed conveyors and cart dumper systems efficiently control baler feed rates for optimum performance in a complete baling system.



GTS HH-60 HORIZONTAL BALER

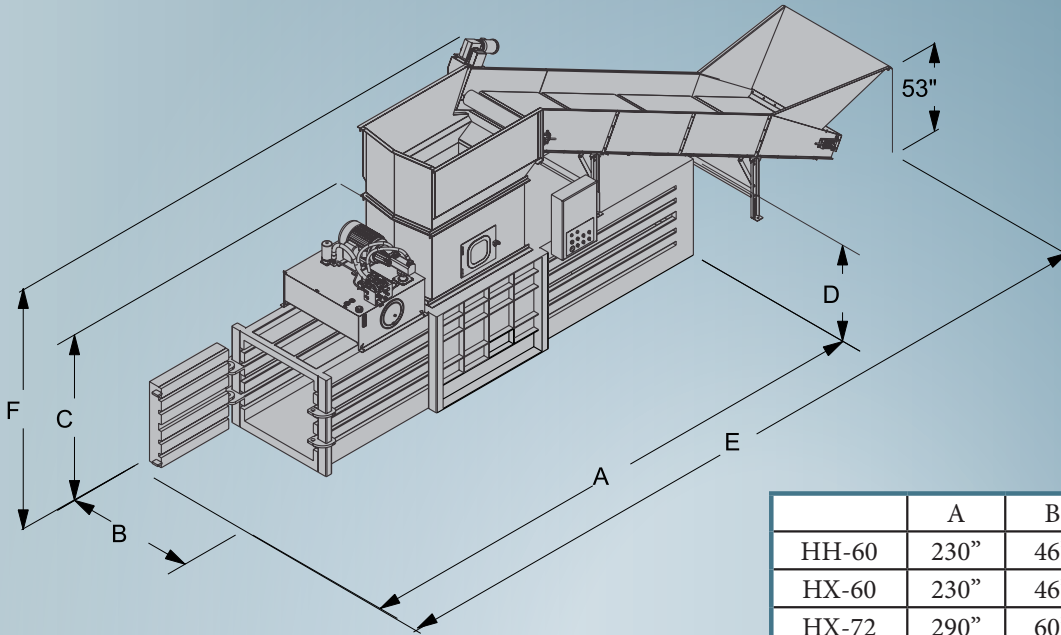

	A	B	C	D	E	F
HH-60	230"	46"	91"	49"	378-1/2"	121"
HX-60	230"	46"	91"	49"	378-1/2"	121"
HX-72	290"	60"	100"	58"	449-1/2"	143"
HX-72-W	314"	66"	100"	58"	461-1/2"	145-1/2"

SPECIFICATIONS

Model		HH-60	HX-60	HX-72	HX-72-W
Nominal Bale Size	L	60"	60"	72"	72"
	W	30"	30"	42"	48"
	H	40"	40"	48"	48"
Bale Weight Up to	(OCC)	1,100 lbs	1,400 lbs	2,200 lbs	2,400 lbs
Throughput	(OCC)	2.5 bales per hr	2.5 bales per hr	2.5 bales per hr	2.5 bales per hr
Main Cylinder	B	7"	7"	8"	8"
	S	54"	54"	70"	82"
	R	4"	4"	5"	5"
Door Cylinder	B	4"	4"	4"	4"
	S	12"	12"	12"	12"
	R	1-3/4"	1-3/4"	1-3/4"	1-3/4"
Motor		20 hp	25 hp	30 hp	30 hp
Pump @1800 rpm		37.5 Gpm	37.5 Gpm	63 Gpm	63 Gpm
System Pressure	Normal	2,000 psi	2,800 psi	2,000 psi	2,000 psi
	Maximum	2,400 psi	3,100 psi	2,400 psi	2,400 psi
Platen Force	Normal	76,900 lbs	107,700 lbs	100,500 lbs	100,500 lbs
	Maximum	92,300 lbs	119,300 lbs	120,600 lbs	120,600 lbs
Platen Face Pressure	Normal	65.2 psi	91.3 psi	50.5 psi	44.1 psi
	Maximum	78.2 psi	101.1 psi	60.5 psi	52.9 psi
Cycle Time no Load		24 sec	24 sec	23.5 sec	27.5 sec
Unit Weight		13,000 lbs	13,500 lbs	15,900 lbs	16,500 lbs



GLOBAL TRASH SOLUTIONS

CONTACT US

Global Trash Solutions
1194 Old Dixie Hwy. Suite 7
Lake Park, FL 33403
(866) 760-8194

www.GlobalTrashSolutions.com