

# GTS Vertical Trash Compactor

This compact, liquid tight compactor/container is designed to eliminate the need for multiple front load containers. Loadable from the ground, off a dock, or through the wall with optional chute fed systems available. The Vertical Compactor is designed to allow customized loading options along with versatility in container size allowing for volume growth without the need to change compactors.

## STANDARD FEATURES

- UL/CUL Listed Control Panel.
- Integral Power Unit.
- Key Operated Controls.
- Key operated controls



## DESIGN FEATURES

- Vertically adjustable legs allow the compactor to accommodate a 3,4,5,6 or 8 cubic yard container without changing compactors.
- No disconnect required. This eliminates the need for driver to exit the truck, saving time and money.
- Feed access door is designed to eliminate trash from gathering on top of press head.

## LOADING CAPABILITIES


- The VC unit offers loading capabilities from front, rear or side feed loading. Its can be combined with an open chute or thru-the-wall access for customized loading access.
- Feed heights starting at 40 1/4"



GLOBAL TRASH  
SOLUTIONS  
2011-2012  
GLOBAL TRASH

# GTS VERTICAL COMPACTORS

## SPECIFICATIONS

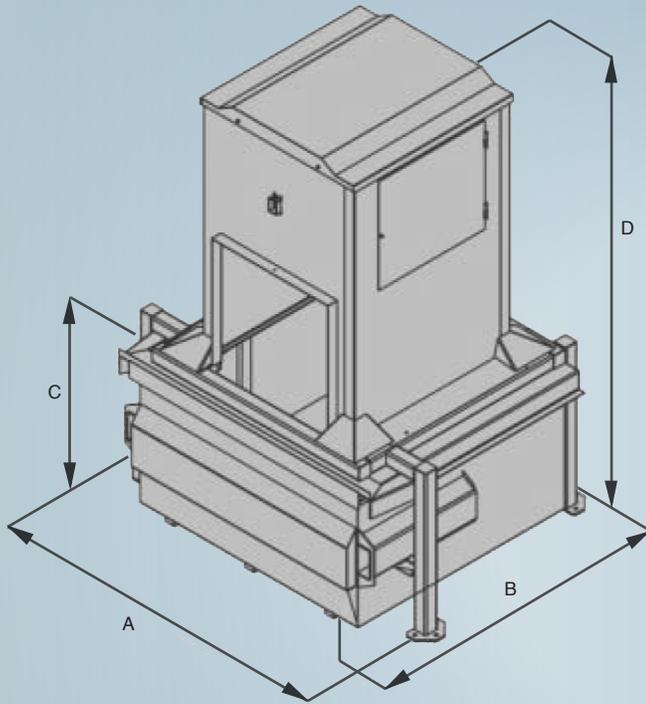

CONTAINER SIZE / TYPE	A	B	C	D	COMPACTOR WEIGHT
3-YD-FL	100"	79"	40-1/4"	115-1/4"	3892 lbs.
4-YD-FL	100"	79"	46-1/4"	121-1/4"	3973 lbs.
4-YD-RL	82"	100"	46-1/4"	121-1/4"	4050 lbs.
5-YD-FL	100"	95-1/2"	56-1/4"	131-1/4"	4183 lbs.
6-YD-FL	100"	95-1/2"	56-1/4"	131-1/4"	4294 lbs.
8-YD-FL	100"	95-1/2"	74"	150"	4510 lbs.

<b>GENERAL:</b>		
Charge Box Capacity		See Chart
Dimensions		See Chart
Clear Top Opening		34 1/4"L x 38"W
Cycle Time		35 sec.
Compaction Force		24,650 lbs.
Ram Face Pressure		11 psi
Ram Penetration		10"
Ram Face Dimensions		48"L x 48"W
WASTEC Rated		2.08 Cu YDS
<b>CONSTRUCTION:</b>		
Container		
	Floor	11 ga.
	Sides	11 ga.
		3" channel
	Trim	1-1/2" x 1-1/2" x 11 ga square tube
	Lift Pockets	Conform to WASTEC guidelines
Presshead	Sides	7 ga
	Face	1/4" Steel Plate
		Vertical Push
	Guides	UHMW strips
Chassis		Steel tube Frame
		11 ga. Sheet Steel Shroud
<b>ELECTRICAL:</b>		
Motor		5 hp
Voltage		208/230/460 Vac 60Hz Three Phase
		(230 Vac 60Hz Single Phase)
		(optional, 1 1/2 hp)
<b>HYDRAULIC:</b>		
Pump Type		VANE
Pump Capacity		6 gpm @ 1800 rpm
Tank Capacity		12 gal
Hydraulic Cylinder x2	Bore	3"
	Stroke	37 1/4"
	Rod Dia.	2"
Operating Pressure		2000 psi

## CONTACT US

(886) 760-8194

www.GlobalTrashSolutions.com